



place on LPC_EC bus








Update 1105 (R2.0)

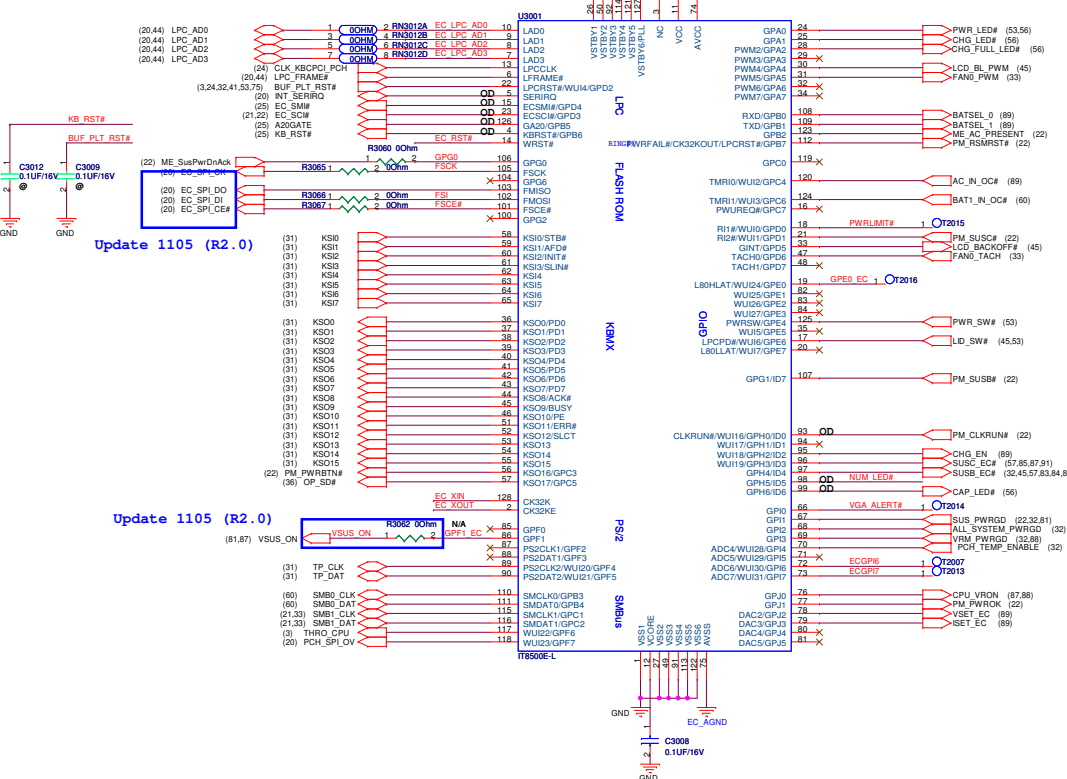

Update 1105 (R2.0)

Update 1105 (R2.0)

Update 1105 (R2.0)

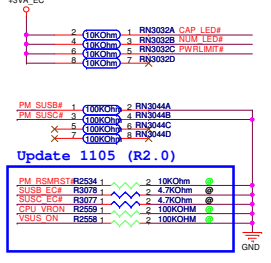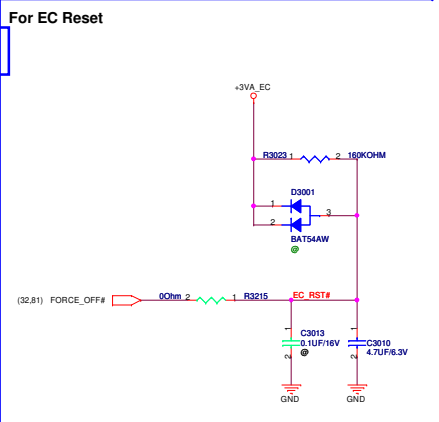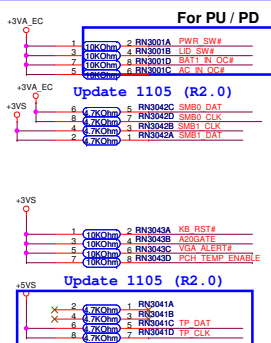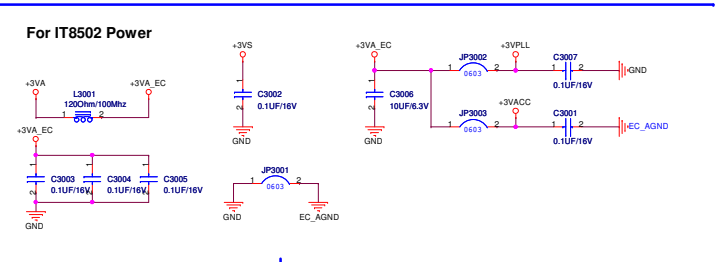

For EC Hardware Strap For iAMT pin name

IO Base Address AC_IPRESNT, PM_S4_STATE#, S4_STATE_ON, PM_SLP_M#, SLP_M_ON, EC_WLAN_PWR, MP_PWRGD, AC_PRESENT, LAN_WOL_EN, +3VM_PD, +15VM_+3VMCLK_PG, SUSPWR_ACK

Note: It can be programmable by EC firmware

Share Memory Note: It can be programmable by EC firmware

PP Enable Note: Default Int. Pull-Low